


FEATURES/BENEFITS


- Engineering-grade acetal with barbed inlet for self-piercing insertion into tubing
- Barbed outlet for secure connection to 1/4" distribution tubing
- Self-flushing and anti-siphoning design avoids clogging and ingress of debris
- Pressure compensated to provide consistent flow rate from 15 to 45 psi
- "Winged" design with textured finger grips for easy installation

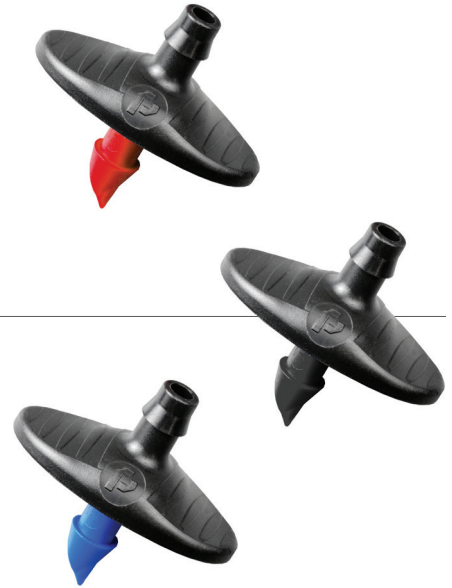

SPECIFICATIONS

PRODUCT	DESCRIPTION	COLOR	Bag QTY
PT-DE17-20PC-25	Self-Piercing Emitter 2.0 GPH	Red	25
PT-DE17-20PC-100	Self-Piercing Emitter 2.0 GPH	Red	100
PT-DE17-10PC-25	Self-Piercing Emitter 1.0 GPH	Black	25
PT-DE17-10PC-100	Self-Piercing Emitter 1.0 GPH	Black	100
PT-DE17-05PC-25	Self-Piercing Emitter 0.5 GPH	Blue	25
PT-DE17-05PC-100	Self-Piercing Emitter 0.5 GPH	Blue	100

FLOW RATE

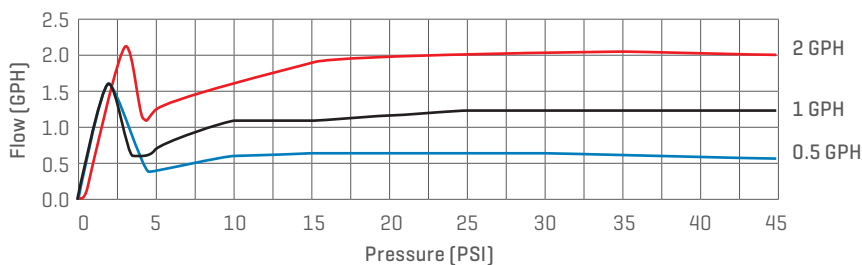

PERFORMANCE CHART

PRESSURE (PSI)	FLOW RATE (GPH)		
	1/2 GPH	1 GPH	2 GPH
5	0.45	0.77	1.28
10	0.60	1.06	1.78
15	0.60	1.10	1.93
20	0.60	1.14	1.96
25	0.61	1.20	2.00
30	0.62	1.22	2.03
35	0.62	1.23	2.03
40	0.61	1.23	2.03
45	0.60	1.21	2.00
50	0.58	1.20	1.96