




# The best performing granular mulch—period!

- FASTER ACTING • BETTER GROWTH • 3 WAYS TO APPLY



Seed Aide® CoverGrow™ is an advanced technology granular mulch made from recycled wood and cellulose fibers. Once applied to a seeded area and activated by water, the granules quickly expand and disperse to provide outstanding protection and water-holding performance right where it's needed. Whether you're spot treating smaller bare spots or hydroseeding larger areas, CoverGrow is the easy and convenient way to establish vegetation.

## Compared to Competitive Granular Mulches, CoverGrow provides:

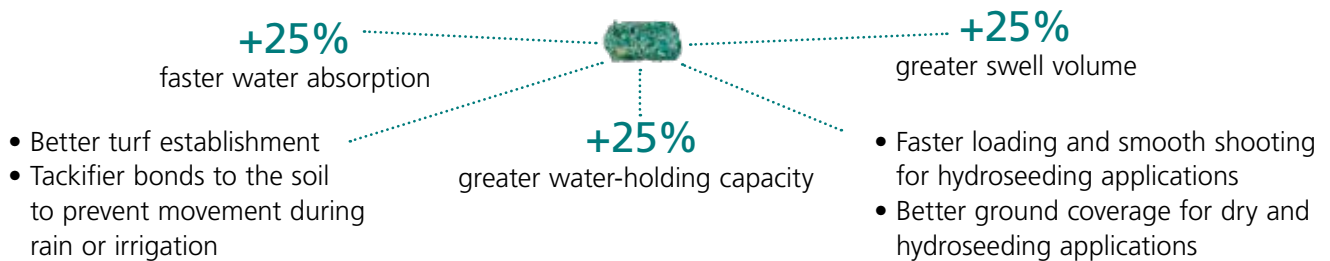

### Hydroseeding

- Rapid dispersion and fast mixing in jet-agitated hydroseeders
- Easy application of the smooth-shooting, high-coverage slurry
- Protects soil from rainfall impact to stay in place longer than competition due to advanced tackifier technology

### 3 WAYS TO APPLY



### Broadcast with Spreader or by Hand

- Increased swelling, dispersion and coverage compared to leading dry applied pellets
- Smoother flowing for easy spreader application
- Stays in place due to advanced tackifier technology

# Profile® CoverGrow™ Technical Data

## COMPOSITION

Thermally Processed* Virgin Wood Fiber	37%
Cellulose Fiber	58%
Wetting Agent including high-viscosity colloidal polysaccharides	5%
(Seed not included)	

\* Heated to a temperature greater than 380 degrees Fahrenheit (193 degrees Celsius) for 5 minutes at a pressure greater than 50 psi (345 kPa) in order to be Thermally Refined/Processed and to achieve phytosanitization.

## INSTALLATION

### Hydroseeding:

Strictly comply with manufacturer's installation instructions and recommendations. Use approved hydro-spraying machines. Do not exceed maximum slope length of 20 feet (6.1 m) when slope gradients are steeper than 4H to 1V.

Add 60 pounds (27 kg) per 100 gallons (379 L) of water along with seed when hydroseeding; confirm loading rates with equipment manufacturer.

Slope Gradient/Condition	Rate
Flat to 5H:1V Slopes	1,500 lb/ac (1,680 kg/ha)
5H:1V to 4H:1V Slopes	2,500 lb/ac (2,800 kg/ha)
3H:1V Slopes	3,000 lb/ac (3,360 kg/ha)

### Broadcast Spreading:

Prepare or rake the soil, spread the seed and apply CoverGrow. Profile recommends using a 36" drop spreader with a fixed rate plate. You may also spread by hand for spot or patch seeding. Do not exceed maximum slope length of 20 feet (6.1 m) when slope gradients are steeper than 4H to 1V.

Slope Gradient/Condition	Rate
Flat to 5H:1V Slopes	50 lb/1,000 sq ft (22.7 kg/93 sq m)
5H:1V to 4H:1V Slopes	75 lb/1,000 sq ft (34 kg/93 sq m)


## PACKAGING

40-lb bags (18 kg)  
48 bags per pallet  
Bulk Density: 24 +/- 2 lb/ft<sup>3</sup>




CoverGrow™ quickly and easily establishes vegetation no matter what your application method. It's the perfect solution for bare spots, dead patches, irregular shaped areas and roadside strips.

CoverGrow Mulching Granules give you 50 pounds of coverage in a 40 pound bag

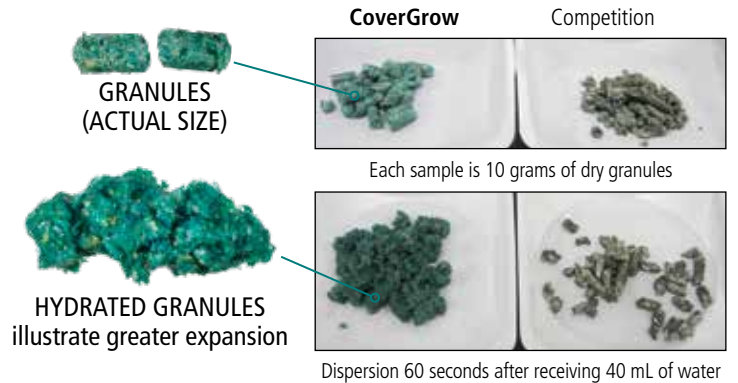

Visit [profilecovergrow.com](http://profilecovergrow.com) and watch a video of CoverGrow in action.



For technical information or distribution, please call 800-508-8681.  
For customer service, call 800-366-1180.  
For warranty information, visit [profileproducts.com](http://profileproducts.com).  
750 W. Lake Cook Road • Suite 440 • Buffalo Grove, IL 60089  
[profileproducts.com](http://profileproducts.com)

© 2019 PROFILE Products LLC.  
All rights reserved.



Find us on [facebook.com/profileEVS](https://facebook.com/profileEVS)

Profile and Seed Aide are registered trademarks of PROFILE Products LLC.  
CoverGrow and Solutions for your Environment are trademarks of PROFILE Products LLC.

CGROW-13 02/19